



**PLAN**

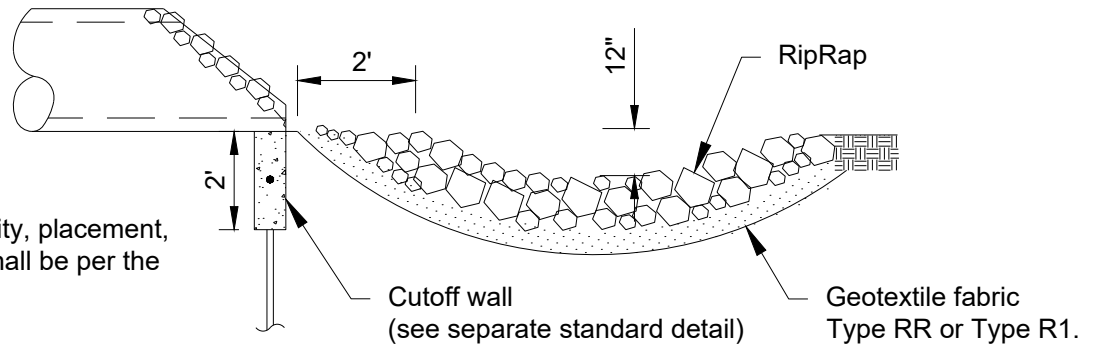

**SECTION A-A**

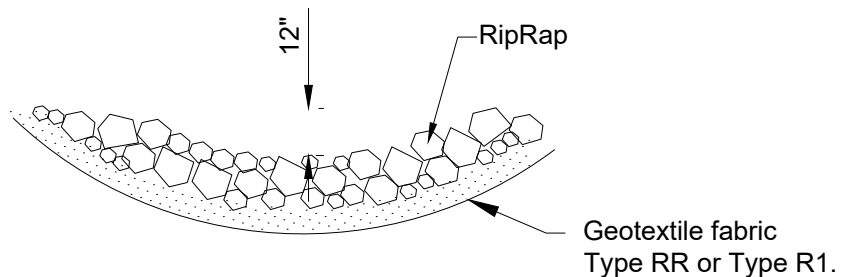

**SECTION B-B**

**Notes:**

1. Riprap size, quantity, placement, and dimensions shall be per the Plans.
2. Construct cutoff wall 4' wider than end section.
3. Rebar centered within the cutoff wall shall be #4 @ 12" O.C. both horizontal and vertical.
4. A 1/4" min. steel plate may be bolted to the face of the bottom of the end section with stainless steel anchor bolts as a substitute for the concrete cutoff wall. The plate shall be 4' deep and 4' wider than the end section.

A:\STANDARD\_SPECS & DETAIL\SI\2019\Detail\Plans\STO-11\_STABILIZED\_OUTFALL.dwg

City Plate No.:  
STO-11  
Last Revision:  
6/5/2019  
File:  
STO\_11.dwg

**STANDARD DETAILS  
STABILIZED OUTFALL**

