


Grout bottom of manhole to 1/2 Ø at pipe and slope grout 2" toward invert

Casting	Lid Type	A	B
1642	B	27"	7"

PLAN

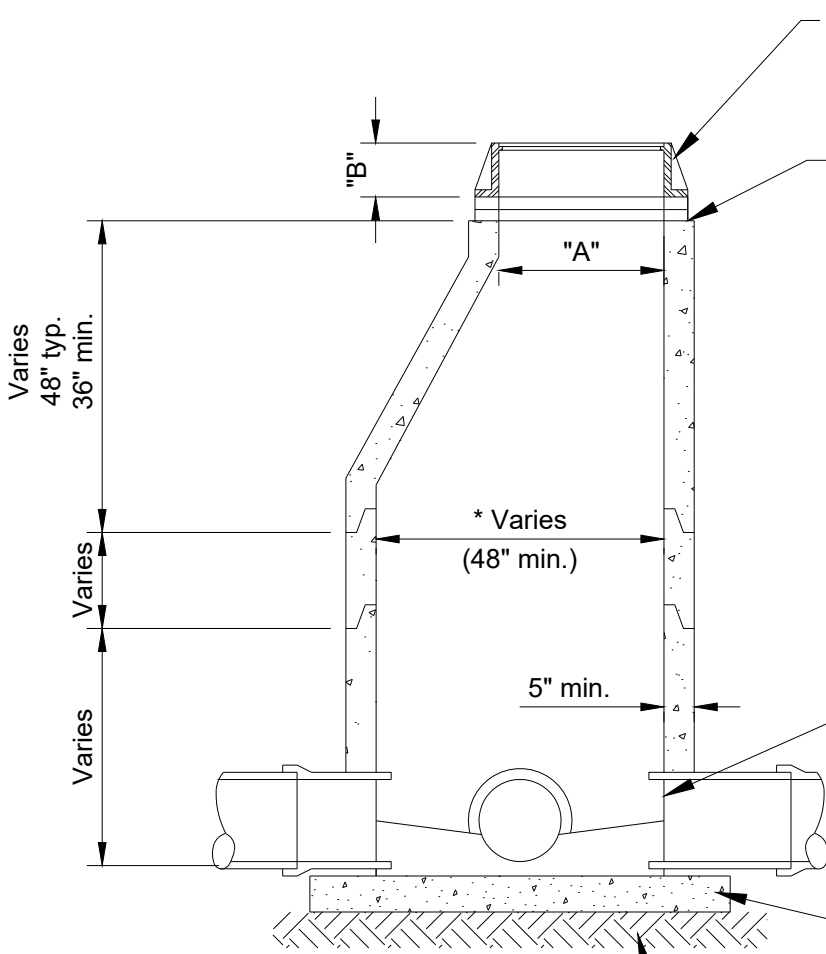

Neenah frame and cover or equal lettered "STORM SEWER", with 2 concealed pick holes Type F.

Adjustment rings per STR-1 detail.

Notes:

1. Doghouses shall be grouted on both the inside and outside.
2. Precast concrete sections only. No block structures are allowed.
3. Rubber gaskets or premium butyl rubber joint sealant on all riser section joints.
4. Orient cone so opening is above outlet.

SECTION

*Determined by pipe size.

M:\STANDARD SPECS & DETAILS\2021\Detail\STO-2 - STORM SEWER - JUNCTION MANHOLE.dwg

City Plate No.:
STO-2
Last Revision:
12/18/2020
Section:
2700

**STANDARD DETAILS
STORM SEWER
JUNCTION MANHOLE**

