


**Note:**  
No concrete behind or on top of catch basin casting.

**PLAN**

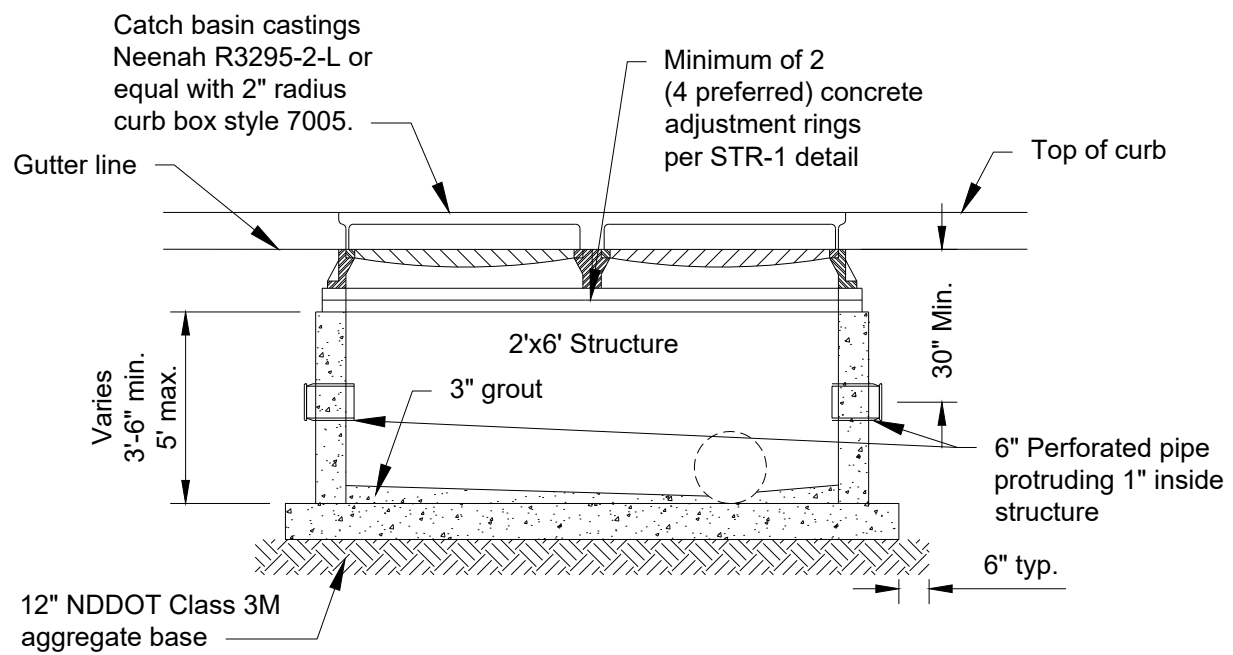

**SECTION A - A**

**Notes:**

1. Doghouses shall be grouted on both the inside and outside.
2. Precast concrete sections only. No block structures allowed.
3. Catch basin manhole if build is greater than 5' or if required to accommodate outlet pipe size/alignment.
4. At sag locations, catch basin rim to be depressed 1" below design gutter line grade.
5. 4" vertical hood opening max.
3. Drain tile holes to be precast or core drilled.
4. When drain tile location conflicts with other pipe connections, core drill holes in the field elsewhere in the catch basin. flow must be maintained.

M:\STANDARD SPECS & DETAILS\2021\Details\STO-7 DOUBLE CATCH BASIN CURB AND GUTTER INSTALLATION.dwg

City Plate No.: STO-7
Last Revision: 12/18/2020
Section: 2700

**STANDARD DETAILS  
DOUBLE CATCH BASIN  
CURB & GUTTER INSTALLATION**

